

Silencers - Hockey Puck

Silencer Selection

Call Silex for immediate assistance in selecting the appropriate silencer that best suits your application's acoustical and backpressure requirements or consult the silencer selection guide in our catalogue. You can also use Silex's exclusive Silencer Sizing and Selection Program "Silex Digital Engineer" found on the Company's secure website at www.silex.com.

Application & Performance

The Hockey Puck series of silencers are designed specifically for enclosures and marine applications where silencer height is critical. The silencer is manufactured from carbon steel, fully welded and finished with high temperature paint. Flanges are ANSI 125/150#. Drain included.

Dimensions

Model	A	B	C	H	I	J	Wgt.
HP-CU-4	4	8.0 (203)	28 (711)	2 (51)	4 (102)	10.0 (254)	110 (50)
HP-CU-5	5	8.5 (216)	32 (813)	2 (51)	4 (102)	10.5 (267)	136 (62)
HP-CU-6	6	9.5 (241)	36 (914)	2 (51)	4 (102)	11.5 (292)	172 (78)
HP-CU-8	8	11.0 (279)	46 (1168)	2 (51)	4 (102)	13.0 (330)	306 (139)
HP-CU-10	10	14.0 (356)	50 (1270)	2 (51)	4 (102)	16.0 (406)	388 (176)
HP-CU-12	12	18.0 (457)	60 (1524)	2 (51)	4 (102)	20.0 (508)	611 (277)
HP-CU-14	14	21.0 (533)	68 (1727)	3 (76)	5 (127)	24.0 (610)	910 (413)
HP-CU-16	16	23.0 (584)	76 (1930)	3 (76)	5 (127)	26.0 (660)	1133 (514)
HP-CU-18	18	24.0 (610)	84 (2134)	3 (76)	5 (127)	27.0 (686)	1369 (621)

Options

- Aluminized steel, 304, 316 or 316L stainless steel, Corten Steel
- Dual inlet or Custom inlet/outlet configurations
- Thermal insulation blankets to suit all configurations
- Specify Mounting bracket location. (see Silencer Guide)
- High temperature aluminum or black paint

Metric dimensions rounded to nearest mm.





Dimensions and weights are nominal and may vary slightly in production models.

HP-CU Series

25 - 30 dBA

Critical Grade
Uninsulated

Typical Attenuation Curve

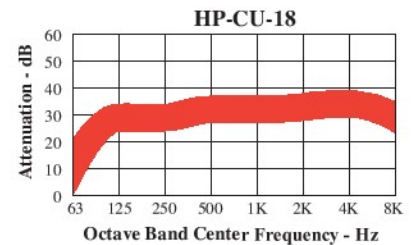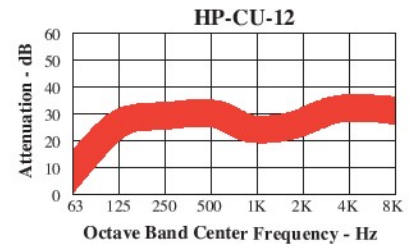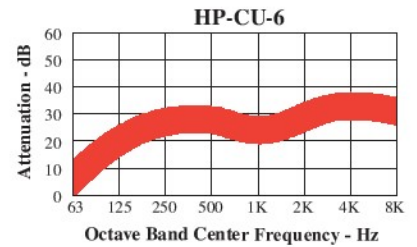

Std Configuration: HP-CU-8 Carbon Steel

Possible to drop to 6" depending on piping run

Silex Innovations Inc.
Phone 905 612 4000
Fax 905 612 8999
www.silex.com

Li-0004 05-11

800 387 7818